
# moooi

# Raimond II Tensegrity

**RAIMOND PUTS** 

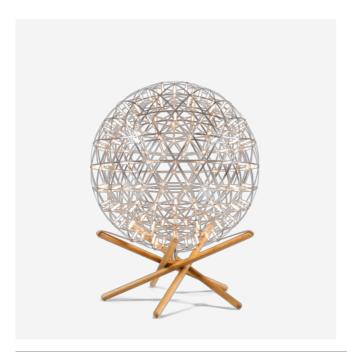

The Raimond Tensegrity is a floor lamp made from elegant metal, complemented with the sturdy earthiness of wood. Tensegrity is a term that was first described by Buckminster Fuller as an architectural term. It refers to the interconnected wooden structure that uses tension and pressure to keep its shape. The beauty of the Raimond Tensegrity lies not only in its contrasting materials, but also in the trigonometric harmony of both structures. Mathematical perfection times two.

### Detailing



Raimond Puts never saw his final design. But, together with Raimond's wife, artist & designer Tis Ernst, Moooi completed the Raimond Tensegrity.

### Colours



Stainless steel

### Raimond II Tensegrity / Raimond II Tensegrity, R61

#### **Dimensions**

61cm | 24"





80cm | 31.5"

#### Product

width 61cm | 24" HEIGHT 80cm | 31.5" DEPTH 61cm | 24" DIAMETER 61cm | 24" WEIGHT NETTO 10kg | 22.05lbs

### **Packaging**

width  $75 \mathrm{cm} \mid 29.5"$ Height  $75 \mathrm{cm} \mid 29.5"$ Cubage  $0.42 \mathrm{m}^3 \mid 14.9 \mathrm{ft}^3$ Length  $75 \mathrm{cm} \mid 29.5"$ Weight  $10 \mathrm{kg} \mid 22.05 \mathrm{lbs}$ 

#### Technical CE / CU

#### MATERIAL

Stainless Steel Sphere (indoor use, not resistant to marine environemts) with PMMA lenses, wooden legs and leather straps

**ENERGY LABEL** 

Energy Label B

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE 120-250

MAX POWER CONSUMPTION

17W

LIFETIME

50000 hours

**CABLE LENGTH** 

500cm | 196.9"

COLOUR TEMPERATURE

2523 K

All directions

**DIMMING & LIGHTING CONTROL** 

Dimmer on power cord

See last page for more information about the dimming possibilities.

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

162

FREQUENCY 50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

**SWITCH** 

In line dimmer switch integrated in power supply

housing

**CRI** 92

LIGHT OUTPUT

1134 lm

### Raimond II Tensegrity / Raimond II Tensegrity, R89

**Dimensions** 

89cm | 35"





Product

**WIDTH** 89cm | 35" **HEIGHT** 113cm | 44.5" **DEPTH** 89cm | 35" **DIAMETER** 89cm | 35" **WEIGHT NETTO** 16kg | 35.27lbs **WEIGHT** 16kg | 35.27lbs

Packaging

**wiDTH** 104cm | 40.9" **HEIGHT** 104cm | 40.9" **CUBAGE**  $1.12\text{m}^3 \mid 39.72\text{ft}^3$ **LENGTH** 104cm | 40.9"

### Technical CE / CU

Stainless Steel Sphere (indoor use, not resistant to marine environemts) with PMMA lenses, wooden legs and leather straps

**ENERGY LABEL** 

Energy Label B

LIGHTSOURCE INCLUDED

Yes

**INPUT VOLTAGE** 120-250

MAX POWER CONSUMPTION

26W

LIFETIME

50000 hours

CABLE LENGTH

500cm | 196.9"

**COLOUR TEMPERATURE** 

2523 K

LIGHT DIRECTION All directions

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

252

**FREQUENCY** 50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

In line dimmer switch integrated in power supply

housing

CRI 92

LIGHT OUTPUT

1744 lm

#### **DIMMING & LIGHTING CONTROL**

Dimmer on power cord

See last page for more information about the dimming possibilities.



## Dimming & Lighting Control

### Dimmer on power cord

Compatible models: Raimond II Tensegrity, R61 CE, Raimond II Tensegrity, R61 CU, Raimond II Tensegrity, R89 CE, Raimond II Tensegrity, R89 CU